




## Temperature Sensitive Washer EYECAP-WT

### Key Features:

- ✓ Bare eye overheat inspection possible for the colored part without separate equipment for pre-detection of improper installation
- ✓ High quality installation
- ✓ Prevention effect of power failure and fire
- ✓ Temperature detection functions at the washer insulation ring (color change to white at 50°C). UL 94-V0 incombustible material
- ✓ Smaller; could fit manufacturing facilities applications & machinery connections
- ✓ Not melting on high temperature, does not generate hazardous gas
- ✓ Overheat detection by temperature sensitive outer circle part with reversible color change. Inspection with the naked eye increase efficiency and reduces 80% of the costs
- ✓ The world first safety Temperature Sensitive Washer made of Silicon
- ✓ Detection of Thermal burn on all connected parts with bolts, such as booth-duct, booth-bar, power distribution panel
- ✓ One system with bolt and nut avoid any detachment by traditional thermal tape and prevention of accident at a glance

### Main Applications:

- Manufacturing equipment.
- Energy distribution cabinets.
- Power stations.
- Power distribution stations.
- Railways and airports.
- Hospitals.
- Buildings.
- Construction and infrastructure networks.
- Electronic industries.
- Military and Medical large scale systems.

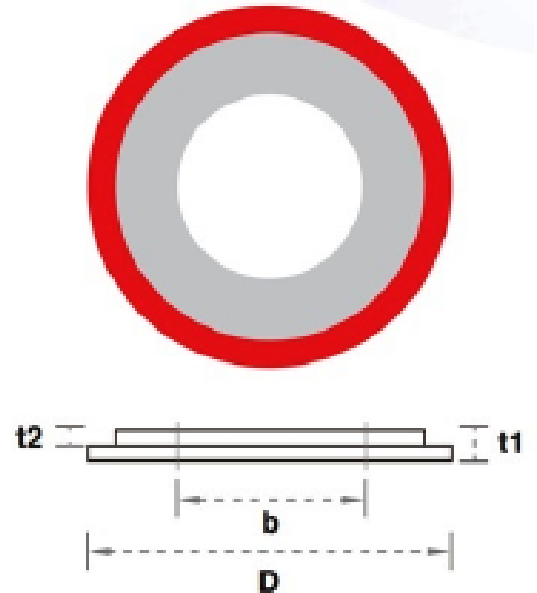

ISO 9001, CE | REACH, RoHS | KERI (ARC Resistance test) | UL | CTK (Temperature test)

Max. Operating Voltage & Temperature: 600 VRMS / 150°C

## EYECAP-Washer

### Product List, Parameters & Specifications

No	Tamuz p/n:	Product dimensions (mm) (Tolerances: T ± 10%)				Color
		D	b	t1	t2	
1	E-WT-8R	17.0	8.2	3.0	1.5	Red
2	E-WT-8B	17.0	8.2	3.0	1.5	Blue
3	E-WT-8Y	17.0	8.2	3.0	1.5	Yellow
4	E-WT-8BK	17.0	8.2	3.0	1.5	Black
5	E-WT-10R	23.0	10.2	3.0	1.5	Red
6	E-WT-10B	23.0	10.2	3.0	1.5	Blue
7	E-WT-10Y	23.0	10.2	3.0	1.5	Yellow
8	E-WT-10BK	23.0	10.2	3.0	1.5	Black
9	E-WT-12R	26.0	12.2	3.0	1.5	Red
10	E-WT-12B	26.0	12.2	3.0	1.5	Blue
11	E-WT-12Y	26.0	12.2	3.0	1.5	Yellow
12	E-WT-12BK	26.0	12.2	3.0	1.5	Black
13	E-WT-14R	32.0	14.2	3.0	1.5	Red
14	E-WT-14B	32.0	14.2	3.0	1.5	Blue
15	E-WT-14Y	32.0	14.2	3.0	1.5	Yellow
16	E-WT-14BK	32.0	14.2	3.0	1.5	Black
17	E-WT-16R	32.0	16.2	3.0	1.5	Red
18	E-WT-16B	32.0	16.2	3.0	1.5	Blue
19	E-WT-16Y	32.0	16.2	3.0	1.5	Yellow
20	E-WT-16BK	32.0	16.2	3.0	1.5	Black